

Investigation of the effect of removal of pre-cuticle with different concentrations using continuous biological aeration process

Masoumeh Sadeghi¹

Abstract

Introduction: One of the important issues to achieve sustainable development is to pay attention to environmental management. On the other hand, one of the important issues that threaten the health of the environment are resistant and toxic compounds that enter the environment through industrial wastewater. Among the various pollutants, phenol and its derivatives (cuticle) are of special importance. The aim of this study was to investigate the removal of pre-cuticles with concentrations (5, 10 and 25 ml) using the biological process of continuous aeration and considering the hydraulic retention time and organic charge concentration. Methods: The present study is an experimental-laboratory study in which the effect of variables of initial concentration of pericticol (5,10,25,75,100 mg / l), hydraulic retention time (2,5,8,24 hours) concentration Input load (100,150,200) mg / L was investigated for pericardial removal in a continuous aeration biological reactor. Results: The results showed that the removal efficiency of pericticol at the input concentration of 25 mg / l, the hydraulic retention time of 8 hours and in BOD5 the input at 150 mg / l in the aeration reactor was the highest and the hydraulic retention time was 5 hours at the concentration of 100%. Is . However, at a concentration of 100 mg, a time of 8 hours in BOD 150 mg / l is the highest value. The results show that with increasing the input BOD, the removal percentage increases and with increasing the input cuticle concentration, the removal percentage decreases. Discussion & Conclusion: The results of this study indicate that the process of biodegradation of continuous aeration can have a good efficiency in removing the pericarp and the results showed that the removal efficiency can be 99%.

Keywords: Activated sludge, Continuous aeration, Biological process, Practical

I. Introduction

Lack of water resources and environmental problems due to the discharge of wastewater and effluents into the receiving waters and toxic compounds through industrial wastewater have forced human beings to use various

¹ Zahedan University of Medical Sciences, Sistan and Baluchestan, Iran

solutions to treat wastewater and reuse it. Among the various contaminants, phenol compounds and their derivatives (cuticles) are of special importance (1, 2). Cuticle or pyrocticol 2,1-dihydroxybenzene is a phenolic compound with molecular formula $C_6H_4(OH)_2$ (3). Phenolic compounds are materials in which one or more hydroxyl groups are attached to a benzene ring. Aromatic hydrocarbons with a production of millions of tons per year are among the 50 compounds that have the largest volume of chemical production, which is widely used in photography, cosmetics, rubber, antioxidant production, chemical compounds, agriculture and industrial wastewater. There are various such as coal conversion, coking, pesticides, insecticides, oil refineries, pulp and paper, plastics, textiles, paints, polymer resins, medicines, wood, etc. (4,5). These compounds are contaminants that have very harmful effects on living organisms even at low concentrations and are widely found in industrial solutions (6). About 20 million kilograms of pericardium are consumed annually in the world (7), which after entering the environment can easily accumulate in soil, surface water and groundwater and cause one of the most important environmental concerns (8). This compound affects the quality of water resources. In humans and other living organisms, exposure to pyrocticol can lead to estrogen degradation, damage to the nervous system and its precursors, eye, skin and respiratory tract irritation, and its metabolite can lead to neurological diseases, DNA damage, and even death (9). Due to the difficulty of reducing and eliminating it, strict standards have been set for the discharge of phenolics into the environment (7). Pyroctocol is a priority and dangerous pollutant and has been listed in the US Environmental Protection Agency's International Agency for Research on Carcinogenesis (7). Due to these problems, the removal of phenolic compounds from industrial wastewater is an important matter for maintaining public health and the environment and is one of the necessary components in the wastewater treatment systems of these industries. Various methods have been proposed for the removal of phenols and phenolic compounds, including adsorption, chemical oxidation, precipitation, distillation, solvent adsorption, ion exchange, membrane processes, reverse osmosis, electrochemical methods, irradiation, etc. (10). Most of these methods have disadvantages such as high treatment cost, need for additional treatment, formation of hazardous by-products, low efficiency and applicability for limited concentrations of contaminants (11). At present, scientific attention is focused on the use of biological methods as an environmentally friendly alternative to the removal of emerging contaminants (11,12). Among the mentioned methods, the biological system is used more than other methods due to its greater compatibility with the environment and is considered safer from an environmental point of view (13). For example, in the process of adsorption of pollutants, they are absorbed unchanged and temporarily on the adsorbent and may release pollutants back into the environment under the influence of various factors. Another advantage of these systems over chemical methods is that they usually do not use any chemicals that are harmful to the environment (14). Among the methods of biodegradation, we can mention the process of suspended growth and adhesion growth, which in the process of suspended growth (such as activated sludge oxidation stream process, have lagoons, and in the attached growth process (such as drip filter and rotating biological reactor) microorganisms in the reactor. Some ineffective fillers adhere and remain (15). Activated sludge process is a process of biological treatment of aerobic suspended growth and uses active microorganisms that are suspended in the reactor to decompose and stabilize dissolved organic matter and colloidal and suspended particles of wastewater (16). Activated sludge contains autotrophic and heterotrophic nitrifying bacteria and nitrobacteria that perform the process of ammonia adsorption well (17).

Extensive aeration is one of the most common methods of treatment with activated sludge in the world and is widely used to treat wastewater and effluents of communities. The wide aeration activated sludge process is similar to the conventional piston flow process, except that the extensive aeration process in the endogenous (self-destructive) respiration phase utilizes a bacterial growth curve that requires less organic loading and longer aeration time than other sludge process methods. It is active, so the cost of electricity consumption increases (18). Wastewater treatment plants with activated sludge method are involved in the problem of floor and balcony kink in treatment, which disrupts the operation and management of the wastewater treatment plant. Bulking is caused by the overgrowth of filamentous microorganisms, which interferes with the deposition of activated sludge clots and poor solids density, thereby reducing the efficiency of biological treatment (19), but in the extensive aeration system the reason for eliminating the initial settling unit is long aeration time. (Cell retention time). Among activated sludge systems, the highest BOD removal efficiency of 90 to 98% is related to the extensive aeration process. In activated sludge with extensive aeration, the hydraulic retention time is about 18 to 36 hours. Due to the long retention time, the F / M ratio in this method is lower than other activated sludge methods and as a result a large number of microorganisms in the aeration pond due to lack Nutrients are destroyed and some microorganisms are used to synthesize and grow new microorganisms (20), so the volume of sludge produced in this process is less than other activated sludge processes. In addition, the sludge obtained by this method is stable and dehydrates well. In this process, the sludge age is 20 to 30 days and aeration is performed by surface mechanical aeration or diffusion system (21, 22). The most important factors affecting the efficiency of the biological wastewater treatment process are the appropriate selection of design, operation and maintenance parameters (23, 24). In a study by Gonzalez et al., (2001) The results showed that phenol degradation by conventional activated sludge and isolated bacteria was more than 90% efficient (25). Therefore, due to the presence of phenolic compounds in the wastewater of these industries and having toxic effects, the use of efficient treatment system to protect the environment in this regard is necessary and inevitable. Evaluation of the efficiency of percutaneous removal in biological process using extensive aeration. In a study conducted by Mal et al. In 2017 on the biological removal of selenite and ammonium using activated sludge in a sequence classification reactor, the results showed that SBR can remove both selenite and ammonium through biorodoxidation and nitrogen desorption, respectively. Eliminate partial denitrification and thus treat selenium and ammonium contaminated waste (26) Also in another study conducted by Hydra et al. In 2016 entitled Biological treatment of tanning wastewater using activated sludge process, the results of this study showed that efficiencies above 90% and 80% for BOD5 and COD, respectively. Sequence can be achieved if ASP operates in the MLVSS range of 3500 mg / L with an aeration time of 12 hours (27) Also in a study by Flas et al. In 2012 entitled Elimination of five acidic drugs ibuprofen, ketoprofen, naproxen, diclofenac and clofibric acid using activated sludge from five urban activated sludge treatment processes with different sludge ages and nitrification capacities, through Batch experiments were performed.

Increasing the age of aerobic sludge from 1 to 3 and 7 was very important for the removal of naproxen and ketoprofen and a significant amount of it increased in the sludge for 7 days or more, which shows that the removal of biodegradable drugs in urban activated sludge processes is highly It depends on the community of heterotrophic bacteria (28).

II. Methods

This study is experimental and laboratory. The study population consists of synthetic solutions containing different concentrations of cuticles. Inclusion criteria for synthetic samples contain contaminant concentrations of cuticle. Sampling is done after the experiments and the number of samples according to the variable under study and finding the optimal point will be according to the table below.

Given that the range of pre-cuticle in 5 concentrations is 5,10,25,75,100 mg / l and 4 is limited hydraulic retention time 2,5,8,24, (hours) and load range up to 100,150,200 (mg / l) in terms of Is BOD and the number of tests is 60.

Table 1. test variables

Variable name	Test range	Number of tests
Catechol concentration	5,10,25,75,100 mg per liter	5
Hydraulic retention time	2, 5, 8, 24, (hours)	4
Biological oxygen demand	100,150,200 (mg per liter)	3
Total		60

The data collection tool is collected through direct reading with the relevant spectrophotometer and according to the percentage of deletion, the efficiency of the process will be evaluated. The method of this research is to first make specific concentrations of cuticle and draw a standard diagram.

Experiments will be used continuously using a glass column with a width and width of 0.4 m and a height of 0.3 m. The hydraulic retention time will be adjusted according to the specificity. The desired substrate is filled with nutrients (manganese chloride, copper sulfate, sodium oxide, sodium molybdate, zinc sulfate, cobalt chloride, acetate, ammonium chloride, manganese sulfate, calcium chloride, hydrogen, potassium phosphate, activated hydrogen oxide, hydrogen peroxide, hydrogen sulfide, hydrogen peroxide, hydrogen sulfide, hydrogen sulfide Zahedan sewage house will be provided and ventilation will be continuous.

The oxygen concentration of the solution will be monitored regularly. 0 The minimum amount of O₂ will be maintained at about 3 mg / l. Nutrient recirculation will be permanent. The specified will be returned to the aeration tank through the control valve. After 3 weeks of controlling the formation of pre-cut biofilm with the

specified concentration during the expressed hydraulic retention time, the output pre-cuticle will be measured. In this study, the effect of pre-cuticle concentration factors (5,10,25,75,100 mg / l) on hydraulic retention time (2,5,8,24, (h)) will be investigated. The elements will be under constant conditions, the set temperature will be 35 degrees.

III. Findings

In order to investigate the elimination of pericardial depletion in continuous aeration reactor, suspended growth and biodegradation, parameters of pericardial output concentration, hydraulic timing (HRT), inlet load, MLSS, MLVSS, DO, pH were measured in the reactors.

Determination of perictal removal in terms of Biological oxygen demand (BOD5) in biodegradation using continuous aeration reactor

Examination of Figure 1 shows that in the hydraulic stand time of 2 hours with increasing the input BOD from 100 to 150 mg / l, the removal percentage increased from 99.13 to 99.47. Decreased by 80/84. And in the hydraulic time of 5 hours with increasing the input load from 100 to 150 mg / l, the percentage of perictal removal has increased from 88.21 to 99.4. In the input equal to 200 mg / l, the percentage of pericardial removal decreased by 81.02 and in the hydraulic retention time of 8 hours, with increasing BOD, the inlet from 100 to 150 mg / l pericardial removal increased from 92.26 to 99.38% and in BOD Equivalent to 200 mg / l, the percentage of pericardial removal decreased to 58.80%. During the hydraulic retention time of 24 hours, with increasing the input BOD load from 100 to 150 mg / l, the percentage of pericardial removal increased from 92.26 to 99.58 and at the inlet equal to 200 mg / l, in pericardial removal to 86.84% Dropped.

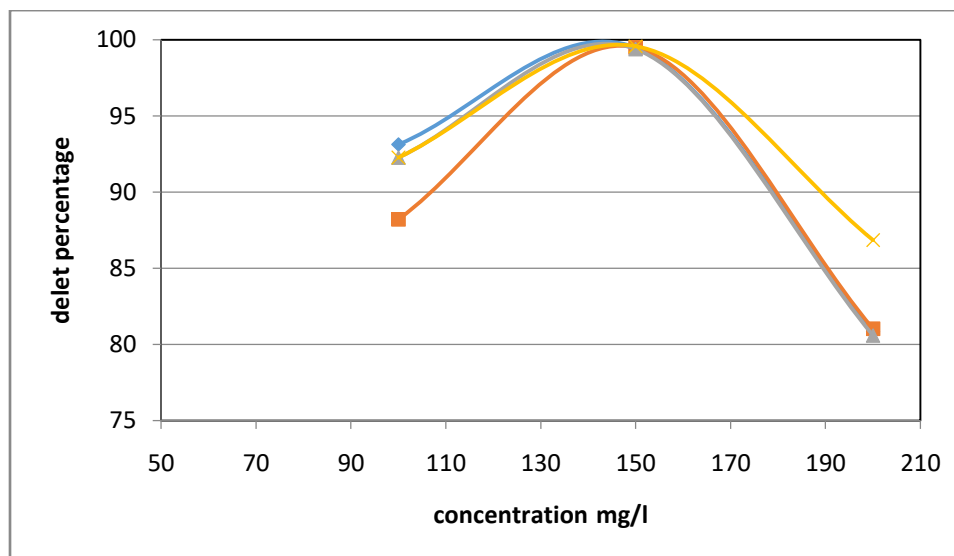


Figure. 1. Effect of different organic loads (input BOD) on the removal of pre-cuticle at different hydraulic retention times in a continuous aeration reactor (initial concentration of pre-cuticle 5 mg / l)

Examination of Figure 2 shows that at a concentration of 10 during the hydraulic time of 2 hours with increasing the input BOD from 100 to 150 mg / l, the percentage of pericardial removal increased from 99.36 to 99.73. In the input BOD equal to 200 mg / l, the percentage of pre-cuticle removal decreased by 82.88%. The input BOD of 200 mg / l decreased the pericardial removal percentage to 84.13. With a residence time of 8 hours, with increasing the BOD of input from 100 to 150 mg / l, the percentage of pericardial removal decreased from 99.98 to 99.71. And in BOD, 200 mg / l, the percentage of removal decreased to 84.13. During the 24-hour hydraulic time, with increasing the input BOD from 100 to 150 mg / l, the percentage of pericardial removal increased from 99.78 to 99.85. 91 decreased.

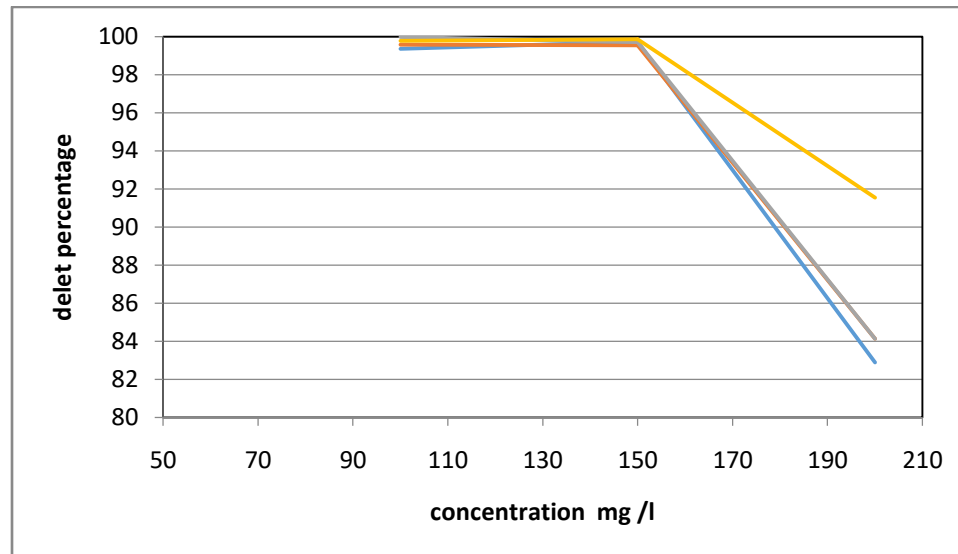


Figure 2. Effect of different organic loads (input BOD) on the removal of pre-cuticle at different hydraulic retention times in a continuous aeration reactor (initial concentration of pre-cuticle 10 mg / l)

Examination of Figure 3 shows that in the hydraulic stand time of 2 hours with increasing the input BOD from 100 to 150 mg / l, the percentage of pericardial removal increased from 99.91 to 99.95. In BOD equal to 200 mg in Liters, the removal percentage has decreased to 96.49. And in the 5-hour residence time, with increasing the input BOD from 100 to 150 mg / l, the percentage of pericardial removal has decreased from 99.78 to 99.49.

In BOD equal to 200 mg / l, the percentage of pericardial removal has increased to 99.78%. / Increased by 99%. In the input BOD equal to 200 mg / l, the percentage of pericardial removal decreased by 97.21. / 98 has decreased. In BOD, the input equal to 200 mg / l has increased 99.37% pericardial removal percentage.

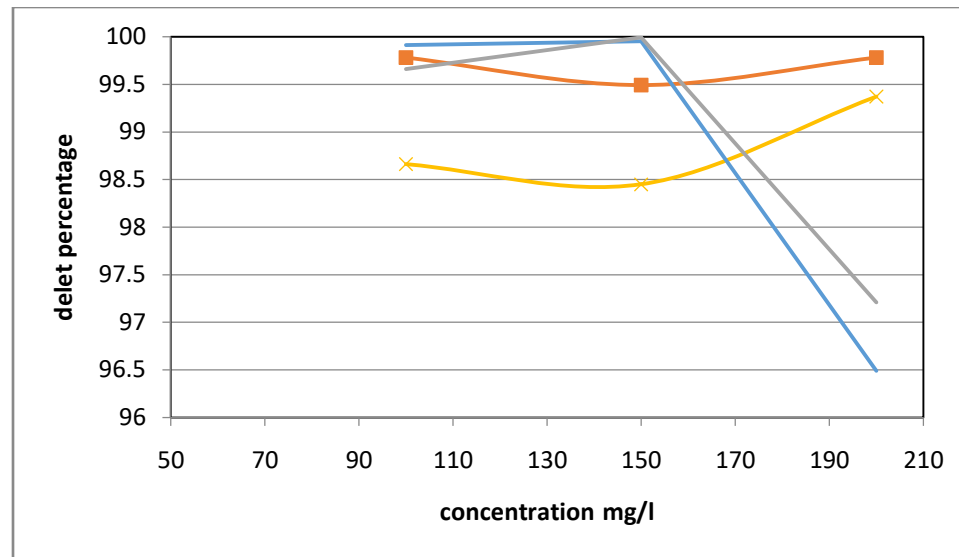


Figure 3. Effect of different organic loads (input BOD) on the removal of pre-cuticle at different hydraulic retention times in a continuous aeration reactor (initial concentration of pre-cuticle 25 mg / l)

Check Figure 4. It is indicated that during the hydraulic retention time equal to 2 hours with increasing the input BOD equal to 100 to 150 mg / l perictal removal percentage increased from 99.69 to 99.89%. And at the input BOD equal to 200 mg / l percent The removal of the pericardium is reduced by 99.65. In the hydraulic residence time equal to 5 hours with increasing the input BOD from 100 to 150 mg / l, the percentage of the removal of the pericardium is increased from 99.58 to 99.79% and in the input BOD equal to 200 mg / l The removal of the pericarp is reduced by 99.53.

During the hydraulic residual 8, with increasing BOD, the inlet from 100 to 150 mg / l decreased from 99.91 to 99.69%. In the input BOD equal to 200 mg / l, the percentage of pericardial removal is reduced to 99.53%. 99 has decreased to 99.36 percent. In BOD input equal to 200 mg / l, the percentage of pericardial removal increased to 99.53%

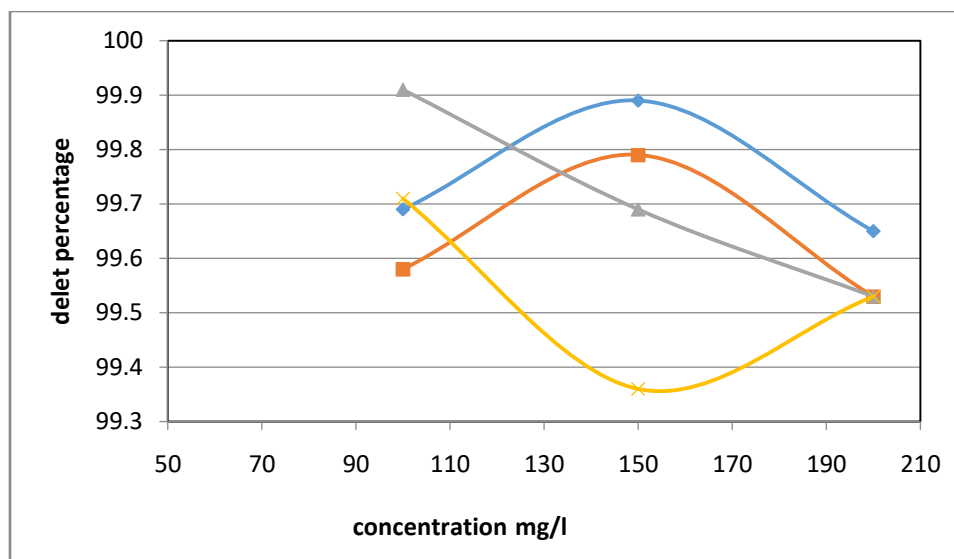


Figure 4. Effect of different organic loads (input BOD) on the removal of pre-cuticle at different hydraulic retention times in a continuous aeration reactor (initial concentration of pre-cuticle 75 mg / l)

Examination of Figure 5 shows that with a residence time of 2 hours with an input BOD equal to 100 to 150 mg / l, the percentage of pre-cuticle removal increased from 99.84 to 99.91%. In BOD, the input content equal to 200 mg / l, the percentage of pericardial removal decreased to 99.23%. At 5 hours with an input BOD equal to 100 to 150 mg / l, the percentage of pericardial removal increased from 99.54 to 99.97%. At 8 hours with an input BOD equal to 100 to 150 mg / l, the percentage of pericardial removal increased from 99.39 to 99.89%. At an input BOD equal to 200 mg / l, the percentage of pericardial removal decreased by 99.56%. In 24 hours with BOD 100 to 150 mg / l, the percentage of pericardial removal increased from 99.02 to 99.92%. In BOD, the intake equal to 200 mg / l decreased the percentage of pericardial removal to 99.51%.

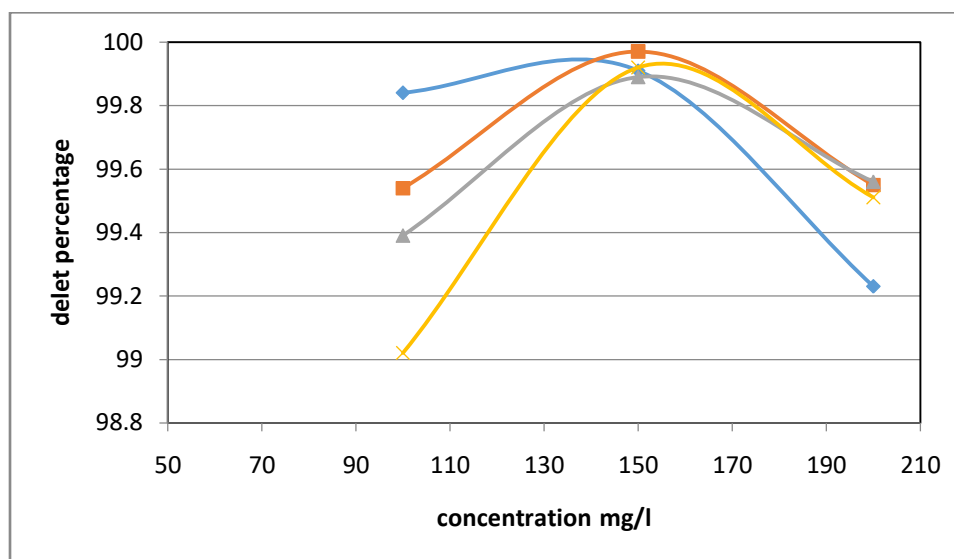


Figure 5. Effect of different organic loads (input BOD) on the removal of pre-cuticle at different hydraulic retention times in a continuous aeration reactor (initial concentration of pre-cuticle 100 mg / l)

Determination of different concentrations in the removal of pre-cuticle at different load inlet to BOD in the reactor in a continuous aeration reactor

Examination of Figure 6 shows that in the initial BOD equal to 100 mg / l with increasing concentration from 5 to 10% removal of pre-cuticle increased from 93.13 to 99.36. With increasing concentration to 100 mg / l removal percentage to / 84 In BOD 150 mg / l with a concentration of 5 to 10 mg / l the percentage of removal increased from 99.47 to 99.73 and then with an increase in concentration of 100 mg / l the percentage of removal increased to 99.91 Is. Also in the initial BOD equal to 200 mg / l with increasing concentration from 5 to 10 mg / l increased from 80.84 to 82.88% and with increasing concentration to 100 mg / l increased to 99.23%. The diagram also shows that in BOD 100 mg / l and concentration of 10 mg / l, the highest percentage of removal (99.98%) has been done.

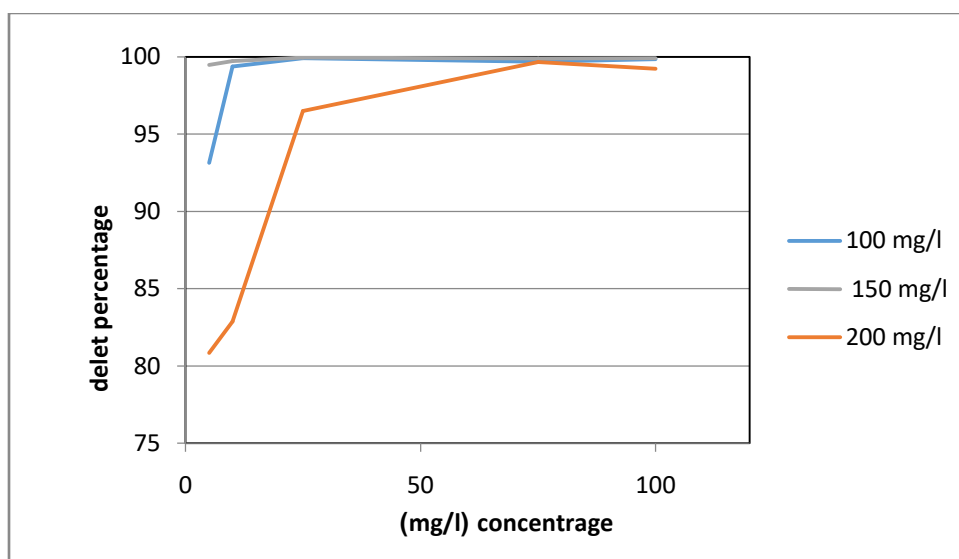


Figure 6. Effect of different concentrations on perictal removal at different load inlet to BOD in the reactor in a continuous aeration reactor suspended growth (during hydraulic retention time 2 hours)

Review Figure 4-7. It is indicated that in BOD equal to 100 mg / l, with increasing concentration from 5 to 10 mg / l, the percentage of pericardial removal increased from 88.21 to 99.57 .With increasing to 100 mg / l, the percentage of removal Decreased to 99/54. In the initial BOD equal to 150 mg / l with increasing the concentration from 5 to 10 mg / l, the percentage of pre-cuticle removal increased from 94.48 to 99.53 and with increasing the concentration from 25 to 75 mg / l, the removal percentage was 99.49 to 99.99. Then increased by increasing the concentration to 100 mg / l and the removal percentage increased to 99.97

In BOD equal to 200 mg / l at a concentration of 5 to 10 mg / l removal efficiency of 81.02. To 84.13. Increased. At a concentration of 25 to 75 mg / l, the removal percentage decreased from 99.78 to 99.53. With

increasing concentration to 100 mg / l, the removal percentage decreased to 91.55. The results show that the highest percentage of pericardial removal at this time is at a concentration of 100 mg / l and at BOD150 mg, which is equal to 99.97%.

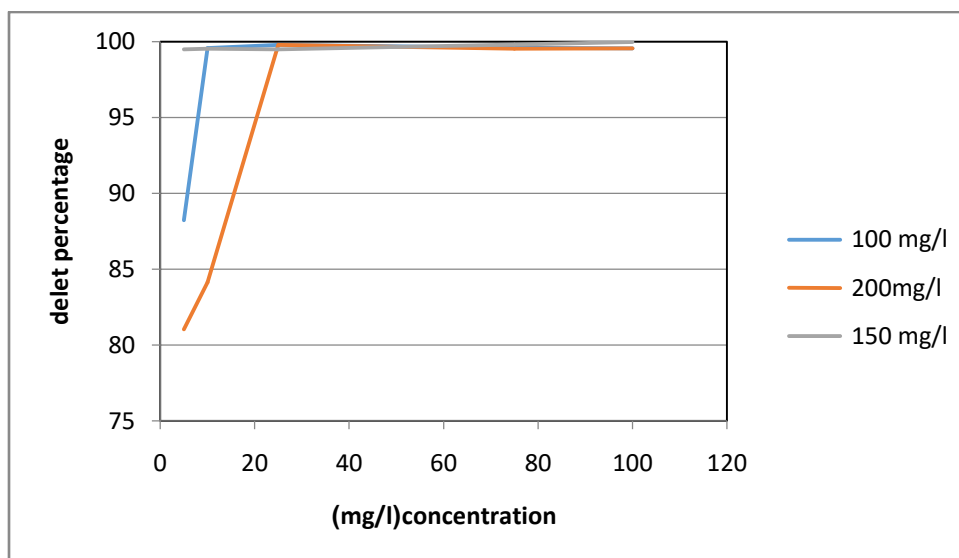


Figure 7. Effect of different concentrations on perictal removal at different load inlet to BOD in the reactor in the continuous aeration reactor suspended growth (during hydraulic retention time 5 hours

Examination of Figure 8 shows that during the hydraulic retention time 8 in the input BOD equal to 100 mg / l with increasing the initial concentration from 5 to 10 mg / l the removal percentage increased from 92.26 to 99.98% removal efficiency and with increasing the concentration from 25 to 75 this amount increased from 66 98. increased to 99.91% and finally at a concentration of 100 mg / l, the percentage of perictal removal decreased to 93.39%. In BOD equal to 150 mg / l, with increasing concentration from 5 to 10 mg / l, the removal percentage increased from 99.35 to 99.71. With increasing concentration to 100 mg / l, the removal percentage increased to 99.88. In initial BOD, equal 200 mg / l with increasing concentration from 5 to 10 mg / l removal efficiency increased from 80.58 to 84.13% At a concentration of 100 mg / l, the percentage of pericardial deletion has increased to 99.56.

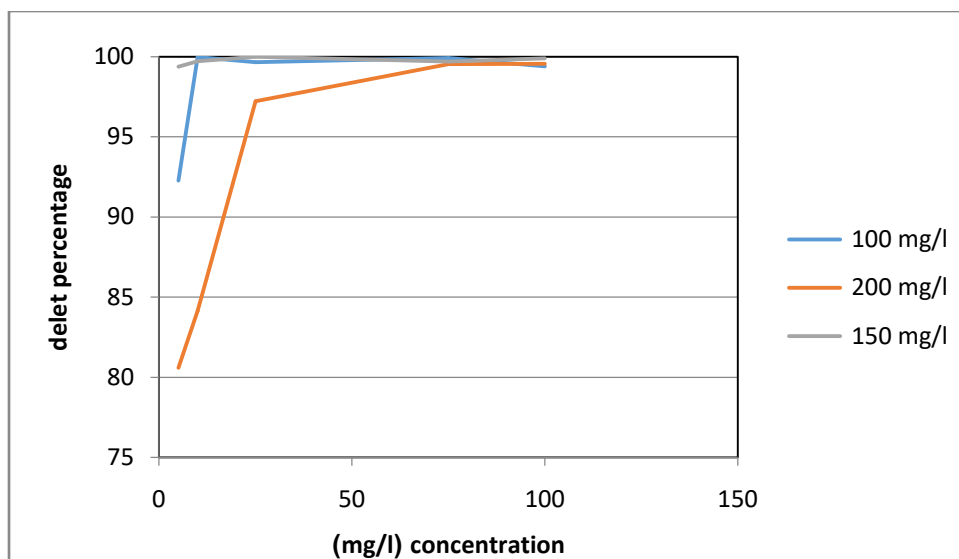


Figure 8. Effect of different concentrations on perictal removal at different load inlet to BOD in the reactor in the continuous aeration reactor suspended growth (during hydraulic retention time 8 hours)

Examination of Figure 9 shows that during 24-hour hydraulic retention time in BOD 100 with increasing concentration from 5 to 10 mg / l, the removal efficiency increased from 92.26 to 99.78%. With increasing concentration from 25 to 75 mg / l, this amount increased from 98.66 to 99.78 cholera and finally with increasing concentration to 100 mg / l, the removal percentage decreased to 99.02. In BOD input equal to 150 mg / l with increasing concentration from 5 to 10 mg / l removal efficiency increased from 99.58 to 99.85

With increasing the concentration to 100 mg / l, the removal percentage decreased by 99.02 and in the input BOD equal to 200 mg / l, the removal efficiency increased by increasing the concentration from 5 to 10 mg / l from 86.84 to 99.54. With increasing concentration to 100 mg / l, the removal percentage decreased to 99.51%. The results show that in 24 hours in BOD 150 and concentration of 100 mg / l we had the highest removal.

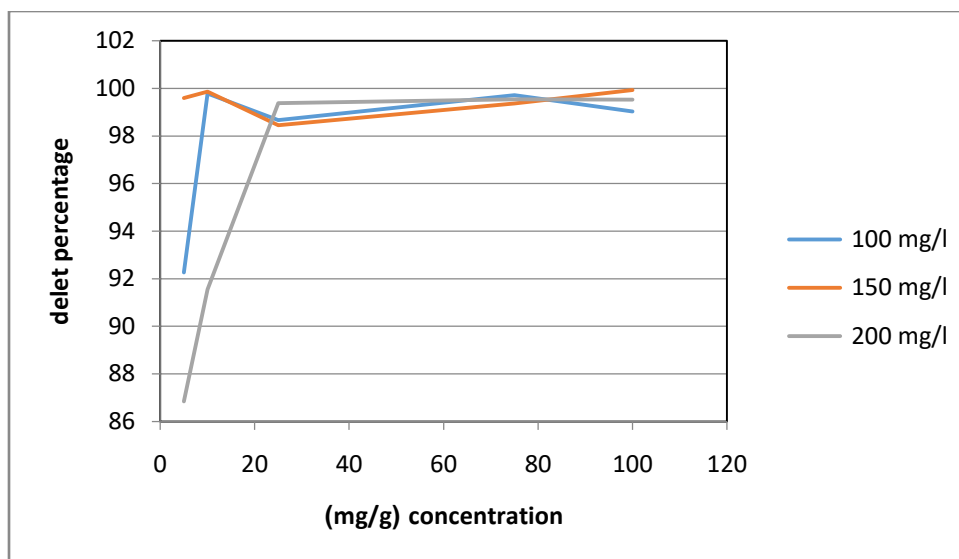


Figure 9. Effect of different concentrations on the removal of pre-cuticle at different load-to-BOD inlets in the reactor in the continuous aeration reactor suspended growth (during hydraulic retention time 24 hours)

Table 2. Synthetic coefficients in the removal of pre-cuticle in the continuous aerator

Y	μ_{\max}	K_d	K_s	k
0.4	15.8	0.27	21.4	0.27

IV. Discussion

Extensive aeration method is one of the most common sludge treatment methods in the field, which is widely used to treat wastewater and effluents of small communities. The process of active aerated sludge is similar to the conventional piston flow process. The difference is that the extensive aeration process in the endogenous self-destructive respiration phase utilizes the bacterial growth curve, which requires less organic loading and longer aeration time. Due to the longer aeration period than other activated sludge process methods, the energy cost increases. One of the most important problems of operation and operation in different systems of activated sludge is the production of floor and sludge volume as a result of reducing the efficiency of wastewater treatment plant. About 40 activated sludge treatment plants in the world face floor and balking problems.

Effect of hydraulic retention time (HRT) on the efficiency of suspended aeration reactor in removing pericardium.

Hydraulic retention time is one of the important parameters of the operation of biological systems, which, while providing the appropriate contact time between the active microbial mass and the refined organic matter,

prevents the leaching of the active cell mass. Overall, the results of this study showed that the highest percentage of pericardial deletion in a continuous aeration reactor with an initial concentration of pericardicle of 25 mg / L; In BOD 150 and the hydraulic retention time was 8 hours, which is 99.99% removal rate. In less than 8 hours of contact time, the removal efficiency of this contaminant has decreased.

Farzadkia et al. (2008) stated that with decreasing hydraulic retention time, MLSS concentration also decreases, which reduces the number of decomposing microorganisms and reduces removal efficiency. Also, reducing hydraulic retention time reduces the amount of contact between contaminants and microorganisms. This leads to a portion of the inlet contaminant leaving the aeration reactor undecomposed (29) Li et al. (2015) in relation to the biological removal of organic pollutants showed that by increasing the hydraulic load in aerobic and anaerobic biological processes, the removal efficiency decreases (30)

Latkar et al. Stated that by using a fixed bed reactor with upward constant flow, the cuticle can be reduced by 93.11% and 90.81% in 6 hours and the pericardial concentration is 750 mg / l and the load kgCOD / m³. Day 4/79 deleted (31) The study and colleagues in the year stated that the SCR system was able to effectively cuticle and input COD with a maximum concentration of 1560 mg / l pericardicle and load kgCOD / m³. Day 38.5 removes 13 hours during hydraulic retention time. It was also stated that reducing HRT to less than 13 hours reduces the efficiency of cuticle removal. It has fixed bed reactors with upward constant flow and SCR (32). Another study showed that the maximum elimination in 8 hours at a concentration of 30 mg / l will be 90% (33).

Effect of Inlet Pre-Cuticle Concentration on the Performance of Suspended Growth Continuous Aeration Reactor in Pre-Cuticle Removal

The results of this study showed that in general, with increasing the concentration of inlet precuticle from 5 to 100 mg / l at all times of hydraulic retention (2, 5, 8 and 24 hours) and at organic inlet loads (100, 150 and 200 mg / l), the removal efficiency increased. But the best removal efficiency occurred at a concentration of 25 mg / l in 8 hours and an organic load of 150 mg / l. In BOD150 mg / l and hydraulic retention time of 8 hours, with increasing the concentration of inlet periculum from 5 to 25 mg / l, the removal efficiency increased from 99.38 to 99.99%, but with increasing concentration from 25 At 100 mg / l there has been a subtle reduction in removal efficiency from 99.99 to 99.89%

. Ali Ahmad Aghapour et al. (2013) stated that if the input concentration increased from 630 to 960 mg / l then to 1295 and finally to 1560 mg / l, the percentage of cuticle removal was 91%, 93% and 91%. %Is reduced. Also, the steady state time for the input-periculture concentration is 630, 960, 1295 and 1560 mg / l 20, 10 and 30 days. When the concentration of the input pericardium changes to a higher level, SCR performance initially decreases but then improves after a few days and reaches stability. The sudden decrease in COD efficacy and removal of the pericardium with increasing pericardial concentration may be due to inhibition of the cuticle in the process of microbial metabolism.

The higher the concentration of the cuticle, the greater the inhibitory effect and consequently the greater the rate of reduction of degradation and consequently the longer the recovery period (34). Nakhli et al. (2014) also

showed that increasing the phenol input concentration from 1000 to 1200 mg / l reduces phenol removal from 97.6% to 94%, respectively. The rate of COD reduction compared to phenol at input concentrations of 1000 and 1200 mg / l was less than 93% and 85.1%, respectively.

At low phenol concentrations, no effect is observed on the impurities of metabolic activity such as specific growth rate, respiration rate, synthesis rate, etc., but with increasing phenol concentration, biological parameters will increase due to the metabolism of microorganisms. Further increase in concentration does not increase biological parameters. Further increase in phenol concentration eventually reduces physiological parameters and inhibits substrate use. (35)

A 2007 study by Adav on aerobic bioremediation of phenol in the presence of phenol concluded that if the phenol concentration was increased from 500 to 2000 mg / L, the biodegradation of pyridine would be limited due to its inhibitory phenol growth properties. (36). In a study conducted by Mostafapour et al. Mg / L has reduced the efficiency so that increasing the dye concentration can affect the metabolism of bacteria in a certain dye concentration can stop growth due to toxicity (37).

Effect of Input Organic Load (BOD) on the Performance of Suspended Growth Continuous Aeration Reactor in Precuticle Removal

The results of the study show that with increasing BOD from 100 to 200 mg / l at low concentrations of pollutants (5,10,25,75 mg / l) the removal efficiency decreased but at high concentrations of pollutants (100 mg G / l) removal efficiency increased at all times and decreased only at the shortest time (2 hours). In general, it can be said that removal of pre-cuticle at all different input concentrations (5,10,25,75,100 mg / l) and hydraulic retention times (2,5,8,24 hours); BOD150 mg / l had the highest efficiency.

The study of JafarzadehL et al. To investigate the effect of biofilm on activated sludge process showed that the rate of COD removal at 0.29 kg COD / m³.h loading was equal to 98.86% and with increasing this loading 0.4 kg COD / m³.h was reduced to 64% but In conventional activated sludge, the system performance was completely disrupted by this loading. (38) Hyun Bae et al. (2003) stated that an excessive increase in BOD in a conventional biological system may cause physiological problems due to the high F / M value (high load relative to the microorganism) so that the system can High F / M decreases and efficiency decreases (39).

V. Final conclusion

The results of this study showed that the highest percentage of pericardial deletion in a continuous aeration reactor with an initial concentration of pericardicle of 25 mg / l; In BOD 150 and the hydraulic retention time was 8 hours, which is 99.99% removal rate, and by reducing the contact time to less than 8 hours, the removal efficiency of this contaminant has decreased.

By increasing the concentration of inlet precuticle from 5 to 100 mg / l at all times of hydraulic retention (2, 5, 8 and 24 hours) and at organic inlet loads (100, 150 and 200 mg / l), the removal efficiency has also increased.

Hydraulic 8 hours with increasing concentration of inlet pericardium from 5 to 25 mg / l removal efficiency increased from 99.38 to 99.99% but with increasing concentration from 25 to 100 mg / l insignificant decrease The removal efficiency has been increased from 99.99 to 99.89%

Increasing BOD from 100 to 200 mg / L at low contaminant concentrations (5,10,25,75 mg / L) reduced removal efficiency but at high contaminant concentrations (100 mg / L) in all Remaining times increase removal efficiency and decrease only in the shortest time (2 hours). In general, it can be said that pericardial removal at all different input concentrations (5, 10, 25, 75, 100 mg / l) and hydraulic retention times (2, 5, 8, 24 hours); BOD150 mg / l had the highest efficiency.

References

1. Datta S, Bhattacharya P, Verma NJJoMS. Removal of aniline from aqueous solution in a mixed flow reactor using emulsion liquid membrane. 2003;226, 1-2:185-201.
2. Ferreira M, Pinto M, Neves IC, Fonseca A, Soares O, Órfão J, et al. Electrochemical oxidation of aniline at mono and bimetallic electro catalysts supported on carbon annotates. 2015;260:309-15.
3. El-Safty SA, Shahat A, Ismael MJJohm. Mesoporous aluminosilica monoliths for the adsorptive removal of small organic pollutants. 2012;201:23-32.
4. Aksu Z, Gönen FJPb. Biosorption of phenol by immobilized activated sludge in a continuous packed bed: prediction of breakthrough curves. 2004;39(5):599-613.
5. Act CEPJCG. Notice with respect to certain substances on the domestic substances list (DSL). 200-141:165;7 .77
6. Cohen S, Belinky PA, Hadar Y, Dosoretz CGJBt. Characterization of catechol derivative removal by lignin peroxidase in aqueous mixture. 2009;100(7):2247-53.
7. Kuramitz H, Nakata Y, Kawasaki M, Tanaka SJC. Electrochemical oxidation of bisphenol A. Application to the removal of bisphenol A using a carbon fiber electrode. 2001;45(1):37-43.
8. An F, Feng X, Gao BJJohm. Adsorption property and mechanism of composite adsorbent PMAA/SiO₂ for aniline. 2010;178(1-3):499-504.
9. Daneshvar N, Khataee A, Ghadim AA, Rasoulifard MJJohm. Decolorization of CI Acid Yellow 23 solution by electrocoagulation process: Investigation of operational parameters and evaluation of specific electrical energy consumption (SEEC). 2007;148(3):566-72.
10. Zhou Y, Lu P, Lu JJCP. Application of natural biosorbent and modified peat for bisphenol a removal from aqueous solutions. 2012;88(2):502-8.
11. Maleki A, Mahvi H. Application of agricultural waste products for removal of phenol in aqueous systems. 2007.
12. Esteve K, Poupot C, Mietton-Peuchot M, Milisic VJWS, Technology. Degradation of pesticide residues in vineyard effluents by activated sludge treatment. 2009;60(7):1885-94.

13. Rehm H-J, Reed G, Mountain A, Ney U, Schomburg D. Biotechnology: A Multi-volume Comprehensive Treatise: Recombinant Proteins, Monoclonal Antibodies and Therapeutic Genes. Vol. 5a1999.
14. Tchobanglous G, Burton F, Stensel D. Wastewater Engineering Treatment and Reuse.(I. McGraw-Hill Companies, Ed.). 2003.
15. Jang Y. Infectious/medical/hospital waste: General characteristics. 2011.
16. Arceivala SJ. Simple waste treatment methods: Aerated lagoons, oxidation ditches, stabilization ponds in Warm and temperate Climates. METU Engineering Faculty Publication. 44: Middle East Technical University;.1973
17. Jung S-J, Miyanaga K, Tanji Y, Unno HJBej. Nitrogenous compounds transformation by the sludge solubilization under alternating aerobic and anaerobic conditions. 2004;21(3):207-12.
18. Takdastan A, Mehrdadi N, Azimi AA, Torabian A, Nabi BidhendiGJIJoC, Engineering C. Investigation of the excess sludge reduction in SBR by oxidizing some sludge by ozone. 2009;28(4):95-104.
19. Takdastan A AATPOGAOOWTUASITCAWTCTroEE, Tehran 2009.
20. Merrylin J, Kaliappan S, Kumar SA, Yeom I-T, Banu JRJES, Research P. Enhancing aerobic digestion potential of municipal waste-activated sludge through removal of extracellular polymeric substance. 2014;21(2):1112-23.
21. Mousavian S, Takdastan A, Seyedsalehi M, Akhavani SJJCPR. Determining the kinetic's coefficients in treatment of sugarcane industry using aerobic activated sludge by complete-mix regime. 2016;8(4):1342-9.
22. Takdastan A, Kordestani B, Nisi A, JalilzadehYangjeh RJJJoEHE. Study of Operational and Maintenance Problems and Parameters of Extended Aeration Activated Sludge Process in Golestan Hospital Wastewater Treatment Plant, Ahvaz, and Their Solutions. 2016;3(4):270-9.
23. Takdastan A, Orooji N, NooriSepehr MJAUMJ. Evaluation of the Hospital Wastewater Activated Sludge Extended Aeration System in the Removal of Estrogenic Compounds (Case Study: Khuzestan Hospitals). 2016;5(1):45-52.
24. Takadistan, Kurdistan, Bahar, Nisi, Abdul Kazim, Jazeera-Pau Jazizi Sewage. Determination of Biosynthetic Coefficients of Biological Process of Activated Sludge Unit with Extended Aeration in Hot Climates in Hospital Wastewater Treatment. 2017; 28 (2): 97-103
25. UV Ultraviolet Fluorophosphate.
26. R hERBolts, smoley,1992.
27. Haydar S, Aziz J, Ahmad MJPIJoE, Sciences A. Biological treatment of tannery wastewater using activated sludge process. 2016.
28. Banat F, Al-Bashir B, Al-Asheh S, Hayajneh OJEp. Adsorption of phenol by bentonite. 2000;107(3):391-8.
29. Farzadzakia M, Rezaei Kalantari Roshanak, Mousavi Seyed Gholamreza, Jafari Sahand, Gholami Mitra. Synthetic wastewater treatment with propylene glycol in a fixed-bed activated sludge reactor in laboratory scale. Ab and Wastewater Spring 2010 Volume 21, 56
- Sadeghi Sh, Dehastani Atar Saeed, Mohammadi Ebrahim Esmaeel, Safa Maryam, The Effect of Hydraulic and Aeration Time on the Performance of Sub-surface Artificial Wellland in Phenol Extraction Research in

- Environmental Health 2018 Volume 4, Number 3, Page 194 to Page 202
Latkar M, Swaminathan K, Chakrabarti T: Kinetics of anaerobic biodegradation of resorcinol catechol and hydroquinone in fixed upflow film – fixed bed reactors. Bioresour Technol 2003, 88: 69–7
- AGHAPOUR, Ali Ahmad; MOUSSAVI, Gholamreza; YAGHMAEIAN, Kamyar. Biological degradation of catechol in wastewater using continuous-inflow reactor (SCR) sequencing. Journal of Environmental Health Science and Engineering, 2013, 11.1:3
- Tchobanoglous, G., Burton, F. L., and Stensel, H. D. (2003). Wastewater engineering: Treatment, disposal, reuse, 4th Ed., Tata McGraw-Hill, New Delhi. Kord Mostafa Pour, et al.
30. Color removal of red dye 18 using a biofilm formed on a bagasse granular bed in a continuous aerobic reactor. Journal of Water and Wastewater, 2015, 26.5:84-91.
- AGHAPOUR, Ali Ahmad; MOUSSAVI, Gholamreza; YAGHMAEIAN, Kamyar. Biological degradation of catechol in wastewater using continuous-inflow reactor (SCR) sequencing. Journal of Environmental Health Science and Engineering, 2013, 11.1:3.
31. NAKHLI, Seyyed Ali Akbar, et al. Biological removal of phenol from saline wastewater using a moving bed biofilm reactor containing acclimated mixed consortia. SpringerPlus, 2014, 3.1:112
32. Adav, S., Lee, D., and N.Q. Ren. 2007. Biodegradation of Pyridine using aerobic granules in the presence of phenol. Water Research J. Vol. 41. pp:2903-2910
33. Tchobanoglous, G., Burton, F. L., and Stensel, H. D. (2003). Wastewater engineering: Treatment, disposal, reuse, 4th Ed., Tata McGraw-Hill, New Delhi. Kord Mostafa Pour, et al.
- Ahmad Reza Yazdanbakhsh; Islam Akbar; Najafi Akram Challenge. Evaluation of Aerobic Sequential Batch Reactor Efficiency for Removal of Formaldehyde from Wastewater. Iranian Journal of Environmental Health Science, Vol. 6, No. 2, Summer 2013, pp. 233-224.
- BAE, Tae-Hyun; HAN, Sung-Soo; TAK, Tae-Moon. Membrane sequencing batch reactor system for the treatment of dairy industry wastewater. Process biochemistry, 2003, 39.2: 221-231.
34. Farzadzakia Mehdi; Jeffrey Sahand; Mary's statue. Treatment of formaldehyde-contaminated synthetic wastewater by continuous anaerobic biofilm batch reactor. School of Public Health and Health Research. Spring 2010 Vol. 8, No. 31.