

# Smart Controller for Heavy Traffic Jam Using Embedded System

D. Sridhar Raja, R. Abinethri and T. Vijayan

**Abstract---** Present Traffic Light Controllers (TLC) are based on microcontroller and microprocessor. These TLC have limitations because it uses the pre-defined hardware, which is functioning according to the program that does not have the flexibility of modification on real time basis. Due to the fixed time intervals of green, orange and red signals the waiting time is more and car uses more fuel. To make traffic light controlling more efficient, we exploit the emergence of new technique called as "Intelligent traffic light controller". This makes the use of Sensor Networks along with Embedded Technology. The timings of Red, Green lights at each crossing of road will be intelligently decided based on the total traffic on all adjacent roads. Thus, optimization of traffic light switching increases road capacity and traffic flow, and can prevent traffic congestions. GSM cell phone interface is also provided for users those who wish to obtain the latest position of traffic on congested roads. This is a unique feature of this project which is very useful to car drivers to take an alternate route in case of congestion. The various performance evaluation criteria are average waiting time, average distance traveled by vehicles, switching frequency of green light at a junction, efficient emergency mode operation and satisfactory operation of SMS using GSM Mobile. The performance of the Intelligent Traffic Light Controller is compared with the Fixed Mode Traffic Light Controller. It is observed that the proposed Intelligent Traffic Light Controller is more efficient than the conventional controller in respect of less waiting time, more distance traveled by average vehicles and efficient operation during emergency mode and GSM interface. Moreover, the designed system has simple architecture, fast response time, user friendliness and scope for further expansion.

**Keywords---** Embedded System, Smart Controller, Heavy Traffic.

---

## I. INTRODUCTION

Fast transportation systems and rapid transit systems are nerves of economic developments for any nation. All developed nations have a well developed transportation system with efficient traffic control on road, rail and air. Transportation of goods, industrial products, manpower and machinery are the key factors which influence the industrial development of any country. Mismanagement and traffic congestion results in long waiting times, loss of fuel and money. It is therefore utmost necessary to have a fast, economical and efficient traffic control system for national development. The monitoring and control of city traffic is becoming a major problem in many countries. With the ever increasing number of vehicles on the road, the Traffic Monitoring Authority has to find new methods of overcoming such a problem. The measures taken are development of new roads and flyovers in the middle of the city; building of several ring such as the inner ring road, middle ring road and outer ring road; introduction of city

---

D. Sridhar Raja, Assistant Professor, Department of Electronics and Instrumentation Engineering, BIST, BIHER, Bharath Institute of Higher Education & Research, Selaiyur, Chennai. E-mail: sridharraja.eie@bharathuniv.ac.in

R. Abinethri, Assistant Professor, Department of Electronics and Instrumentation Engineering, BIST, BIHER, Bharath Institute of Higher Education & Research, Selaiyur, Chennai.

T. Vijayan, Assistant Professor, Department of Electronics and Instrumentation Engineering, BIST, BIHER, Bharath Institute of Higher Education & Research, Selaiyur, Chennai. E-mail: tvij16@gmail.com

trains such as the light rapid transit (LRT), and monorails; restricting of large vehicles in the city during peak hours; and also development of sophisticated traffic monitoring and control systems. Growing numbers of road users and the limited resources provided by current infrastructures lead to ever increasing traveling times. One way to improve traffic flow and safety of the current transportation system is to apply automation and intelligent control methods to roadside infrastructure and vehicles. Transportation research has the goal to optimize transportation flow of people and goods. As the number of road users constantly increases, and resources provided by current infrastructures are limited, intelligent control of traffic will become a very important issue in the future. The problems of typical conventional traffic light Controller are mentioned below:

**A. *Heavy Traffic Jams***

With increasing number of vehicles on road, heavy traffic congestion has substantially increased in major cities. This happened usually at the main junctions commonly in the morning, before office hour and in the evening, after office hours. The main effect of this matter is increased time wasting of the people on the road. The solution for this problem is by developing the program which different setting delays for different junctions. The delay for junctions that have high volume of traffic should be setting longer than the delay for the junction that has low of traffic. This operation is calling Normal Mode.

**B. *No traffic, but still need to wait***

At certain junctions, sometimes even if there is no traffic, people have to wait. Because the traffic light remains red for the preset time period, the road users should wait until the light turn to green. If they run the red light, they have to pay fine. The solution of this problem is by developing a system which detects traffic flow on each road and set timings

**C. *Emergency car stuck in traffic jam***

Usually, during traffic jam, the emergency vehicle, such as ambulance, fire brigade and police will be stuck especially at the traffic light junction. This is because the road users waiting for the traffic light turn to green. This is very critical problem because it can cause the emergency case become complicated and involving life.

**D. *Lack of Traffic Information to users***

Present traffic systems fail to provide traffic information including congested roads and alternate routes available in case of congestion. In the proposed Intelligent Traffic Light Controller (ITLC) all these limitations of existing controller are eliminated. The proposed project of 'Intelligent Traffic Light Controller' uses embedded system (microcontroller 89C51) and has advantages of efficient control, GSM Interface to mobile phones and fast response time. The problem of fixed timing traffic light is totally eliminated in this project. The main objective for this project is to design a program and implement hardware of intelligent traffic light system suitable for real life implementations. This project also aims to design a safe and efficient traffic flow, to assign the right way and minimizes the delay or waiting time at road. The traffic jam will be reduced by increasing the green signal time on busy road and decrease the red signal time in non busy road. The information about congestion on road or possible alternate routes can also be informed to car drivers on demand on his/her GSM mobile phone. Infra Red –Light Emitting Diode (IRLED) transmitter and receivers are used to measure the traffic flow. In short, this project is a

real-time, GSM enabled and intelligent Traffic Light Controller This paper is organized as follows: In section II a brief study of traffic controllers designed in past in literature is presented. The proposed model of ITLC is presented in section III. Design, hardware and software details are explained in this section. Section IV deals with performance evaluation of the proposed system with the conventional fixed time traffic light controllers. Various Performance measures are discussed in this section. Finally, the paper is concluded in section V, which presents conclusion, commercialization of project and future scope for the proposed system.

## **II. LITERATURE SURVEY**

Traffic Management on the road has become a severe problem of today's society. An efficient traffic management techniques are needed to reduce waiting and traveling times, save fuel and money. In order to alleviate the problem, a large number of methods and approaches have been suggested in the literature. It includes rule based learning to the modern fuzzy and neural network approaches. In this section, the various solutions to the traffic control problems suggested in the literature are presented, along with their merits and demerits. Traffic Light Controller using an expert system uses a set of given rules to decide upon the next action. In traffic light control, such an action can change some of the control parameters. Findler and Stapp describe a network of roads connected by traffic light-based expert systems. For each traffic light controller, the set of rules can be optimized by analyzing how often each rule fires, and the success it has. The system could even learn new rules. Authors have shown that their system could improve performance, but they had to make some simplifying assumptions to avoid too much Computation. Tavladakakis and Voulgaris describe a traffic light Controller using a simple predictor. Measurements taken during the current cycle are used to test several possible settings for the next cycle, and the setting resulting in the least amount of queued vehicles is executed. The system seems highly adaptive. Since it only uses data of one cycle, it could not handle strong fluctuations in traffic flow well. In this case, the system would adapt too quickly, resulting in poor performance. Liu introduce a way to overcome problems with Fluctuations. Traffic detectors at both sides of a junction and vehicle identification are used to measure delay of vehicles at a junction. This is projected to an estimated average delay time using a filter function to smooth out or random fluctuations. The control system tries to minimize not only the total delay, but the summed deviations from the average delay as well. Since it is no longer beneficial to let a vehicle wait for a long time, even if letting it pass would increase the total waiting time, this introduces a kind of fairness. Tan describe a fuzzy logic controller for a single junction that should mimic human intelligence. The order of states is predetermined, but the controller can skip a state if there is no traffic in a certain direction. The amount of arriving and waiting vehicles are quantized into fuzzy variables, like many, medium and none. In experiments the fuzzy logic controller showed to be more flexible than fixed controllers and vehicle actuated controllers, allowing traffic to flow more smoothly, and reducing waiting time. A disadvantage of the controller seems to be its dependence on the preset quantification values for the fuzzy variables. They might cause the system to fail if the total amount of traffic varies. Furthermore, the system was only tested on a single junction. Lee et al. studied the use of fuzzy logic in controlling multiple junctions also use fuzzy logic controllers, and adapted them to cope with congested traffic flow. Comparisons with fixed fuzzy-logic traffic light controllers indicated that this enhancement can lead to larger traffic flow under very crowded traffic conditions. However in the most complicated cases where the numbers of lanes are large and may be not only one but more road intersections

and railroad take part, it does make sense to use fuzzy methods containing hierarchy and apply Interpolation to decrease the complexity compare using evolutionary algorithms evolution strategy to evolve a traffic light controller for a single simulated intersection to using the common traffic light controller in the Netherlands (the RWS C-controller). They found comparable results for both systems. Unfortunately they did not try their system on multiple coupled intersections, since dynamics of such networks of traffic nodes are much more Complex and learning or creating controllers for them could show additional interesting behaviors and research questions. Reinforcement learning for traffic light control has first been studied by Thorpe He used a traffic light-based value function, and we used a car-based one. Thorpe used a neural network for the traffic-light based value function which predicts the waiting time for all cars standing at the junction. This means that Thorpe's traffic light controller has to deal with a huge number of states, where learning time and variance may be quite large. Furthermore, Thorpe used a somewhat other form of RL, SARSA (State-Action, Reward-State Action) with eligibility traces and we use model-based RL. Roozmond describes intelligent agent architecture for traffic light control. Intelligent traffic signaling agents (ITSAs) and Road Segment Agents (RSAs) try to perform their own tasks, and try to achieve local optimality. One or more Authority Agents can communicate with groups of ITSAs and RSAs for global performance. All agents act upon beliefs, Desires, and capabilities. No results were presented. From the above discussion, it is obvious that designing a traffic light controller that satisfies all the criteria simultaneously is a complicated task. Each proposed scheme has certain merits and demerits Nevertheless, considering the common limitations of each listed above there is still a scope of designing a better traffic light controller having improved performance in most of the respects that will work optimally in diversified traffic conditions. One such attempt to propose a new traffic control scheme based on actuated car Based approach combined with GSM is made in the research work. One major common drawback of all schemes mentioned above is that they are applicable to the major crossing of road. The congestion conditions for a particular crossing of road are considered to alleviate the problem at that particular road. Providing traffic controllers at each separate crossing is not going to solve the traffic problem of the city as a whole. An integrated approach incorporating proper synchronization between all related crossings is essential to compute the signaling times of signals. In order to do this a proper communication between each crossing must be established and the proper messages must be given to the drivers of vehicles. For example consider, a congestion occurs on a road which is 10 Km away from a person driving a car towards that road. An intelligent system must inform the person about the happenings and should also inform alternate route to avoid loss of time. In this project, we are implementing to inform the car drivers about congested and alternate routes for rapid transit. Conditions on roads are communicated to car drivers on their personal GSM mobile sets, which will help them to select proper route for minimum delay.

### **III. PROPOSED MODEL**

The proposed operations of Intelligent Traffic Light Controller are shown in Figure 1. In this figure the junctions are shown by letters A to F. The Infrared Sensors to detect vehicles is mounted on road. The presence or absence of a vehicle is sensed by a sensor assembly mounted on each road. This acts as an input to the ITLC unit. This input signal indicates the length of vehicles on each road. The ITLC unit generates output signals for Red, Green and Orange Signal and monitors their timings taking into consideration the length of vehicles on each road. The same

information is transmitted to the mobile user which will request for congestion status. If a vehicle driver at junction sends sms on GSM mobile phone to ITLC unit, the driver will get message indicting congestion status of road. In this case it will inform that junction A is congested and the best possible route at this instant is Route 1 via junction E. In addition to above, in the emergency mode, for a vehicle like ambulance, fire fighter or police car, the signals are altered for the fast and easy movement of these vehicle. Consider Figure 1, if an emergency vehicle is passing by the route A-B-C-F, the signals on the roads which are crossing this route will be immediately made red to stop vehicles on these routes. This is a very important feature which is very useful in case of emergency. The basic operation of ITLC can be realized by using embedded system which has advantages of simplicity, user friendly, easily programmable and a facility for GSM mobile interface. In our proposed model the basic operations are implemented using Microcontroller89c51AT. The main reason for selecting this microcontroller is ease of

Programming, sufficient number of input output lines, manageable size of RAM and ROM and simple architecture. The block diagram of the proposed model is shown in Figure 2. The heart of the system is microcontroller AT89c51. For communicating with the external signals additional ports and multiplexers are used. Additional RAM and ROM are used for storing system program and application program. The block diagram consists of the microcontroller, input switching

Matrix, serial communication interface, GSM interface, Real Time Clock 1307, Clock circuit, Relay Driver ULN 2003, LED interfacing circuit. The signals from sensor assembly will be applied to input switching circuit. These input signals from sensors will be in the form of digital signals which corresponds to presence or absence of a vehicle. These digital signals from each lane will be given to the input port of microcontroller, where the microcontroller will determine the length of vehicle at each lane. This information is the input to microcontroller to determine various timing signals. The on and off time of the four junctions will be calculated by microcontroller, in order to keep waiting time minimum. These signals will be applied to two relay drivers which consist of ULN 2003. These relay drivers are level shifters and current amplifiers. The output of relay driver is applied to Red, Green and Orange LED at each junction. IC 24C61 is used for I2C interface. One LCD Display will be provided with each signal. LCD Display is 1088shown only for prototype mode LCD Display will indicate the time left for the signal to become green i.e. it indicates the time a vehicle has to wait at a particular junction.


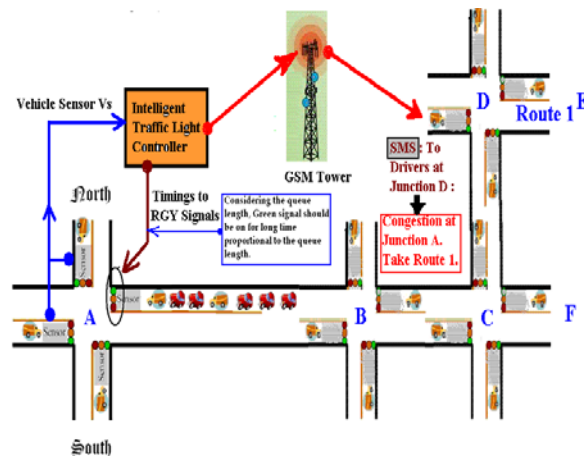


Figure 1 Basic Concept of Proposed Intelligent Traffic Light Controller.

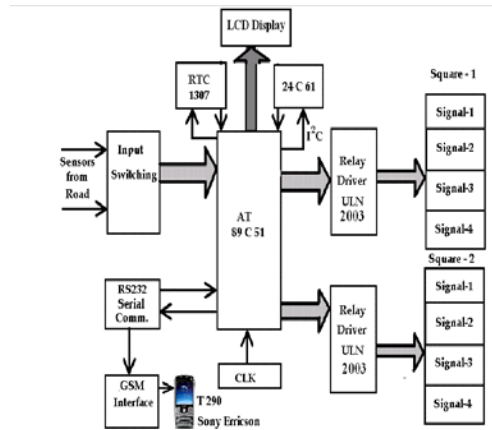

**Figure 2: Block Schematic of Intelligent Traffic Light Controller with GSM Interface.**


Microcontroller is programmed using Assembly Language. Separate routines are written for Input section, Relay drivers, LCD Display, GSM interface. All routines are integrated with the main logic of the system which determines the timing interval at each junction.

#### IV. PERFORMANCE EVALUATION

Performance evaluation criteria used are average waiting time of a vehicle, distance traveled by a vehicle, operation during emergency mode, proper display of time left, signal switching frequency, and satisfactory working of SMS received on GSM Phone. The performance is evaluated with the conventional fixed time traffic light controller. These are mentioned below.

##### A. Average Waiting time of a Vehicle


This indicates the time period for which a vehicle has to wait on the junction. The scenario is simulated for 50 vehicles. The performance is separately calculated for Fixed Time Mode and Intelligent Traffic Controller. Average waiting time is separately calculated for non busy hours and busy hours. The results of this experiment are presented in Figure 3. This clearly indicates that the average waiting time is less for Intelligent Traffic Light Controller during busy (Peak hours and non-busy hours. This is because, the intelligent traffic light controller takes into account the physical presence of vehicles and queue length of vehicles for deciding signal timings. This indicates the proposed model saves time to a large extent.

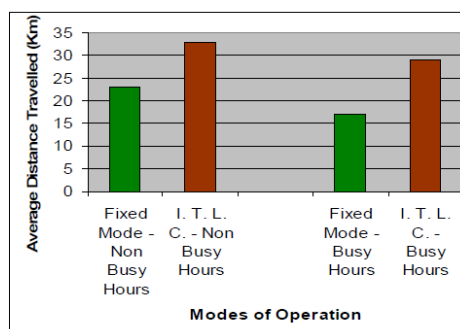

**Figure 3 Average Waiting Time of a Vehicle at a Junction. Sample is simulated for 50 vehicles crossing a junction.**

**B. Distance Traveled by Vehicles**

This is the total distance traveled by vehicle from its source to destination. For evaluation purpose a variable distance is considered at various routes on the road and the distance traveled by each vehicle is calculated and average is computed for 50 vehicles. Figure 4 shows the result. The total distance traveled in case of Fixed Time Traffic Light Controller and the Intelligent Traffic Light Controller is calculated independently for comparison. This indicates that distance traveled in case of intelligent traffic light controller is more as compared with the Fixed Time Traffic Controller.

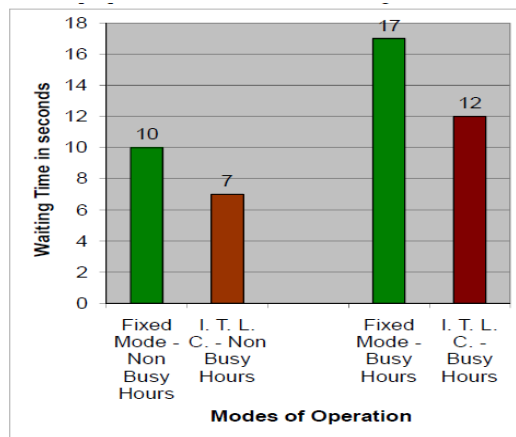


**Figure 4: Average Distance Traveled by Vehicles.**

**C. Emergency Mode**

In case of arrival of Emergency Ambulance or Fire Bridge or Police Vehicle, emergency mode is activated and appropriate signals are generated for the particular junctions. It is observed that this mode of operation is working satisfactory and the vehicles on crossing the route of emergency vehicle gets an alert and Red Signal till emergency vehicle passes by its route. This feature is very useful for metropolitan cities in case of such emergency.

**D. Signal Switching Frequency.**

In case of Intelligent Traffic Controller this switching frequency will be more as compared with Fixed Time Traffic Controller. The graph of Signal Switching Frequencies is shown in Figure 5. It indicates that the switching frequency of signals in Intelligent Traffic Mode is more. It is quite obvious that intelligent traffic light controller operates on feedback of queue length of vehicles hence it is operated frequently. So it is a dynamic System.

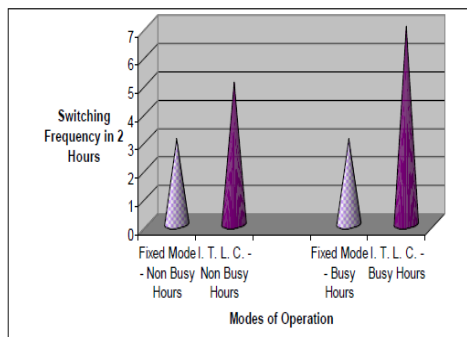

**Figure 5: Switching Frequency of Green Signal for 2 Hours Duration**

## V. CONCLUSION

The improvement of town traffic condition is largely dependent on the modern ways of traffic management and control. Advanced traffic signal controllers and control system contribute to the improvement of the traffic problem. The intelligent of traffic signal controller is introduced in this project with powerful functions and hardware interface. This project has two major phases. The first stage is to design a program, which consists of reading, research, planning and designing a program. Design a traffic light using the state machine is very difficult compare to design using the logic gates. Microcontroller Assembly Language was chosen to write a program code for simulation only to get a timing diagram. After that, second phase is to continue with the hardware implementation using the gate logic and the interface light is using LED. The blinking is depending on the state machine transition. GSM Interface is also provided for sending traffic alerts signals for drivers on road and precautions be taken not to indulge in traffic congestion. It is observed that the proposed Intelligent Traffic Light Controller is more efficient than the conventional controller in respect of less waiting time, more distance traveled by average vehicles and efficient operation during emergency mode and GSM interface. Moreover, the designed system has simple architecture, fast response time, user friendliness and scope for further expansion.

## REFERENCES

- [1] Tamilselvi N., Krishnamoorthy P., Dhamotharan R., Arumugam P., Sagadevan E., Analysis of total phenols, total tannins and screening of phytocomponents in *Indigofera aspalathoides* (Shivanar Vembu) Vahl EX DC, Journal of Chemical and Pharmaceutical Research, V-4, I-6, PP:3259-3262, 2012.
- [2] Godlyn Abraham A., Manikandan A., Manikandan E., Jaganathan S.K., Baykal A., Sri Renganathan P., Enhanced opto-magneto properties of  $\text{Ni}_x\text{Mg}_{1-x}\text{Fe}_2\text{O}_4$  ( $0.0 \leq x \leq 1.0$ ) ferrites nano-catalysts, Journal of Nanoelectronics and Optoelectronics, V-12, I-12, PP:1326-1333, 2017.
- [3] Barathiraja C., Manikandan A., Uduman Mohideen A.M., Jayasree S., Antony S.A., Magnetically Recyclable Spinel  $\text{Mn}_x\text{Ni}_{1-x}\text{Fe}_2\text{O}_4$  ( $x= 0.0-0.5$ ) Nano-photocatalysts: Structural, Morphological and Opto-magnetic Properties, Journal of Superconductivity and Novel Magnetism, V-29, I-2, PP:477-486, 2016.
- [4] Kaviyarasu K., Manikandan E., Nuru Z.Y., Maaza M., Investigation on the structural properties of  $\text{CeO}_2$  nanofibers via CTAB surfactant, Materials Letters, V-160, PP:61-63, 2015.
- [5] Kaviyarasu K., Manikandan E., Maaza M., Synthesis of CdS flower-like hierarchical microspheres as electrode material for electrochemical performance, Journal of Alloys and Compounds, V-648, PP:559-563, 2015.
- [6] Sachithanantham P., Sa Nkaran S., Elavenil S., Experimental study on the effect of rise on shallow funicular concrete shells over square ground plan, International Journal of Applied Engineering Research, V-10, I-20, PP:41340-41345, 2015.
- [7] Jayalakshmi T., Krishnamoorthy P., Ramesh Kumar G., Sivamani P., Optimization of culture conditions for keratinase production in *Streptomyces* sp. JRS19 for chick feather wastes degradation, Journal of Chemical and Pharmaceutical Research, V-3, I-4, PP:498-503, 2011.
- [8] Kumarave A., Rangarajan K., Routing algorithm over semi-regular tessellations, 2013 IEEE Conference on Information and Communication Technologies, ICT 2013, PP:1180-1184, 2013.
- [9] Sonia M.M.L., Anand S., Vinosel V.M., Janifer M.A., Pauline S., Manikandan A., Effect of lattice strain on structure, morphology and magneto-dielectric properties of spinel  $\text{NiGd}_x\text{Fe}_{2-x}\text{O}_4$  ferrite nano-crystallites synthesized by sol-gel route, Journal of Magnetism and Magnetic Materials, V-466, PP:238-251, 2018.
- [10] Jeyanthi Rebecca L., Susithra G., Sharmila S., Das M.P., Isolation and screening of chitinase producing *Serratia marcescens* from soil, Journal of Chemical and Pharmaceutical Research, V-5, I-2, PP:192-195, 2013.



- [11] Banumathi B., Vaseeharan B., Rajasekar P., Prabhu N.M., Ramasamy P., Murugan K., Canale A., Benelli G., Exploitation of chemical, herbal and nanoformulated acaricides to control the cattle tick, *Rhipicephalus (Boophilus) microplus* – A review, *Veterinary Parasitology*, V-244, PP:102-110, 2017.
- [12] Gopinath S., Sundararaj M., Elangovan S., Rathakrishnan E., Mixing characteristics of elliptical and rectangular subsonic jets with swirling co-flow, *International Journal of Turbo and Jet Engines*, V-32, I-1, PP:73-83, 2015.
- [13] Thooyamani K.P., Khanaa V., Udayakumar R., Efficiently measuring denial of service attacks using appropriate metrics, *Middle - East Journal of Scientific Research*, V-20, I-12, PP:2464-2470, 2014.
- [14] Padmapriya G., Manikandan A., Krishnasamy V., Jaganathan S.K., Antony S.A., Enhanced Catalytic Activity and Magnetic Properties of Spinel  $MnxZn1-xFe2O4(0.0 \leq x \leq 1.0)$  Nano-Photocatalysts by Microwave Irradiation Route, *Journal of Superconductivity and Novel Magnetism*, V-29, I-8, PP:2141-2149, 2016.
- [15] Rajesh E., Sankari L., Malathi L., Krupaa J.R., Naturally occurring products in cancer therapy, *Journal of Pharmacy and Bioallied Sciences*, V-7, PP:S181-S183, 2015.
- [16] Vanangamudi S., Prabhakar S., Thamotharan C., Anbazhagan R., Dual fuel hybrid bike, *Middle - East Journal of Scientific Research*, V-20, I-12, PP:1819-1822, 2014.
- [17] Brindha G., Krishnakumar T., Vijayalatha S., Emerging trends in tele-medicine in rural healthcare, *International Journal of Pharmacy and Technology*, V-7, I-2, PP:8986-8991, 2015.
- [18] Sharmila S., Jeyanthi Rebecca L., Naveen Chandran P., Kowsalya E., Dutta H., Ray S., Kripanand N.R., Extraction of biofuel from seaweed and analyse its engine performance, *International Journal of Pharmacy and Technology*, V-7, I-2, PP:8870-8875, 2015.
- [19] Thooyamani K.P., Khanaa V., Udayakumar R., Using integrated circuits with low power multi bit flip-flops in different approach, *Middle - East Journal of Scientific Research*, V-20, I-12, PP:2586-2593, 2014.
- [20] Thooyamani K.P., Khanaa V., Udayakumar R., Virtual instrumentation based process of agriculture by automation, *Middle - East Journal of Scientific Research*, V-20, I-12, PP:2604-2612, 2014.
- [21] Udayakumar R., Kaliyamurthie K.P., Khanaa, Thooyamani K.P., Data mining a boon: Predictive system for university topper women in academia, *World Applied Sciences Journal*, V-29, I-14, PP:86-90, 2014.
- [22] Anbuselvi S., Jeyanthi Rebecca L., Sathish Kumar M., Senthilvelan T., GC-MS study of phytochemicals in black gram using two different organic manures, *Journal of Chemical and Pharmaceutical Research*, V-4, I-2, PP:1246-1250, 2012.
- [23] Subramanian A.P., Jaganathan S.K., Manikandan A., Pandiaraj K.N., Gomathi N., Supriyanto E., Recent trends in nano-based drug delivery systems for efficient delivery of phytochemicals in chemotherapy, *RSC Advances*, V-6, I-54, PP:48294-48314, 2016.
- [24] Thooyamani K.P., Khanaa V., Udayakumar R., Partial encryption and partial inference control based disclosure in effective cost cloud, *Middle - East Journal of Scientific Research*, V-20, I-12, PP:2456-2459, 2014.
- [25] Lingeswaran K., Prasad Karamcheti S.S., Gopikrishnan M., Ramu G., Preparation and characterization of chemical bath deposited cds thin film for solar cell, *Middle - East Journal of Scientific Research*, V-20, I-7, PP:812-814, 2014.
- [26] Maruthamani D., Vadivel S., Kumaravel M., Saravanakumar B., Paul B., Dhar S.S., Habibi-Yangjeh A., Manikandan A., Ramadoss G., Fine cutting edge shaped  $Bi_2O_3$ rods/reduced graphene oxide (RGO) composite for supercapacitor and visible-light photocatalytic applications, *Journal of Colloid and Interface Science*, V-498, PP:449-459, 2017.
- [27] Gopalakrishnan K., Sundeep Aanand J., Udayakumar R., Electrical properties of doped azopolyester, *Middle - East Journal of Scientific Research*, V-20, I-11, PP:1402-1412, 2014.
- [28] Subhashree A.R., Parameaswari P.J., Shanthi B., Carnagarin R., Parijatham B.O., The reference intervals for the haematological parameters in healthy adult population of Chennai, Southern India, *Journal of Clinical and Diagnostic Research*, V-6, I-10, PP:1675-1680, 2012.
- [29] Niranjana U., Subramanyam R.B.V., Khanaa V., Developing a Web Recommendation System Based on Closed Sequential Patterns, *Communications in Computer and Information Science*, V-101, PP:171-179, 2010.
- [30] Slimani Y., Baykal A., Manikandan A., Effect of  $Cr^{3+}$  substitution on AC susceptibility of Ba hexaferrite nanoparticles, *Journal of Magnetism and Magnetic Materials*, V-458, PP:204-212, 2018.
- [31] Premkumar S., Ramu G., Gunasekaran S., Baskar D., Solar industrial process heating associated with thermal energy storage for feed water heating, *Middle - East Journal of Scientific Research*, V-20, I-11, PP:1686-1688, 2014.

- [32] Kumar S.S., Karrunakaran C.M., Rao M.R.K., Balasubramanian M.P., Inhibitory effects of *Indigofera aspalathoides* on 20-methylcholanthrene- induced chemical carcinogenesis in rats, *Journal of Carcinogenesis*, V-10, 2011.
- [33] Beula Devamalar P.M., Thulasi Bai V., Srivatsa S.K., Design and architecture of real time web-centric tele health diabetes diagnosis expert system, *International Journal of Medical Engineering and Informatics*, V-1, I-3, PP:307-317, 2009.
- [34] Ravichandran A.T., Srinivas J., Karthick R., Manikandan A., Baykal A., Facile combustion synthesis, structural, morphological, optical and antibacterial studies of  $\text{Bi}_{1-x}\text{Al}_x\text{FeO}_3$  ( $0.0 \leq x \leq 0.15$ ) nanoparticles, *Ceramics International*, V-44, I-11, PP:13247-13252, 2018.
- [35] Thovhogi N., Park E., Manikandan E., Maaza M., Gurib-Fakim A., Physical properties of CdO nanoparticles synthesized by green chemistry via *Hibiscus Sabdariffa* flower extract, *Journal of Alloys and Compounds*, V-655, PP:314-320, 2016.
- [36] Thooyamani K.P., Khanaa V., Udayakumar R., Wide area wireless networks-IETF, *Middle - East Journal of Scientific Research*, V-20, I-12, PP:2042-2046, 2014.
- [37] Sundar Raj M., Saravanan T., Srinivasan V., Design of silicon-carbide based cascaded multilevel inverter, *Middle - East Journal of Scientific Research*, V-20, I-12, PP:1785-1791, 2014.
- [38] Achudhan M., Prem Jayakumar M., Mathematical modeling and control of an electrically-heated catalyst, *International Journal of Applied Engineering Research*, V-9, I-23, PP:23013-, 2014.
- [39] Thooyamani K.P., Khanaa V., Udayakumar R., Application of pattern recognition for farsi license plate recognition, *Middle - East Journal of Scientific Research*, V-18, I-12, PP:1768-1774, 2013.
- [40] Jebaraj S., Iniyar S., Renewable energy programmes in India, *International Journal of Global different solvent extracts of *Murraya koenigii**, *Journal of Chemical and Pharmaceutical Research*, V-5, I-2, PP:279-282, 2013.
- [41] Zain, Z. (2019). High Speed and Low Power GDI based Full Adder. *Journal of VLSI Circuits and Systems*, 1(1), 5-9.
- [42] Udupa, P., & Vishwakarma, S. (2016). A Survey of MRI Segmentation Techniques for Brain Tumor Studies. *Bonfring International Journal of Advances in Image Processing*, 6(3), 22-27.
- [43] Jacob, L., & Quinn, S. (2018). Finding of Frequent Itemset with Two Mask Searches. *Journal of Computational Information Systems*, 14(2), 36-43.
- [44] Manjula, S., & Dr. Banu, R., (2014). An Efficient Compound Scoring Gene Selection Technique (CSGS) for Cancer Classification using Microarrays. *International Journal of Advances in Engineering and Emerging Technology*, 5(5), 234-247.
- [45] Saravanan, G., and Dr.Gopalakrishnan, V. (2014). Resource Allocation for Multimedia Communication on Grid Computing Environment using Hybrid ABC. *Excel International Journal of Technology, Engineering and Management*, 1(2), 36-41.
- [46] Dr. John, E.T., Skaria, B., & Shajan, P.X. (2016). An Overview of Web Content Mining Tools. *Bonfring International Journal of Data Mining*, 6(1), 01-03.
- [47] Alviri, F., & Habibi, S.F. (2015). Reviewing Self-Adaptation Frameworks for the Implementation of Enterprise Resource Planning Systems. *International Academic Journal of Innovative Research*, 2(4), 1-10.
- [48] Soni, K., Kumar, U., & Dosodia, P. (2014). A Various Biometric Application for Authentication and Identification. *International Journal of Communication and Computer Technologies*, 2(1), 6-10.
- [49] Dr.Sebasthirani, K., and Mahalingam, G. (2018). Design of Shunt Active Power Filter with Fuzzy Logic Control for Mitigating Harmonics. *Bonfring International Journal of Industrial Engineering and Management Science*, 8(2), 26-30.
- [50] Asgarnezhad, R., & Mohebbi, K. (2015). A Comparative Classification of Approaches and Applications in Opinion Mining. *International Academic Journal of Science and Engineering*, 2(5), 1-13.